



Aztec

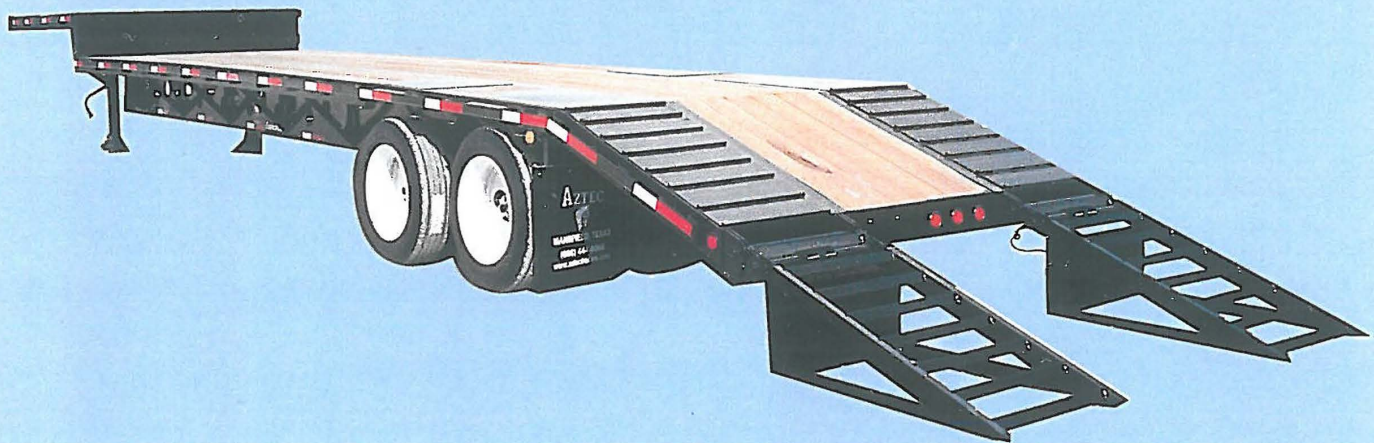

*Shown With
Optional
Widespread*

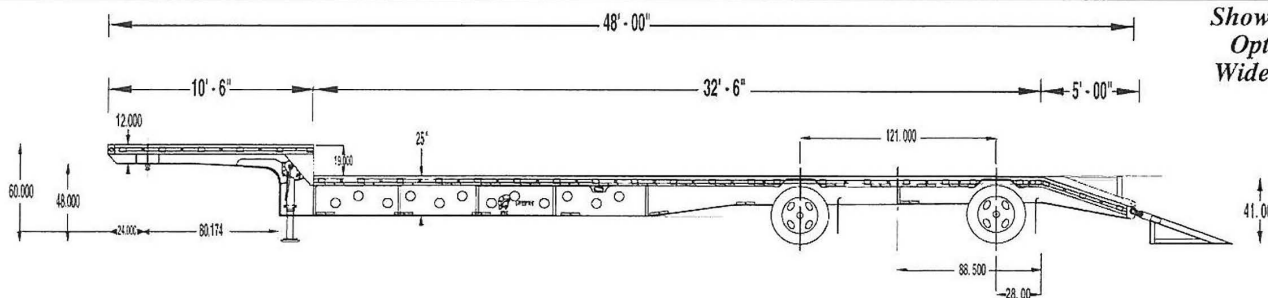

FRAME

- 25" Deep Fabricated Steel Beam
 - 130k p.s.i. Minimum Yield Flanges
 - 3/8" x 5" Top Deck, 1/2" x 5" Lower Deck
 - 3/16" 80k p.s.i. Minimum Yield Web
- 6" Structural Side Rail
- Crossmembers — 14" Centers, 4" Jr. I Beams
- 3/8" x 2 1/2" Rub Rail
- 1 1/4" Pipe Spools Between Stake Pockets
- 24" Kingpin Setting
- 48" 5th Wheel Height
- High Strength Fabricated Knee Braces

UNDERCARRIAGE

- Hendrickson/Turner AA230L Series Itraax Air Ride *OR* Hutchens H9700 TUS Spring Suspension
- 5" Round Axles
- 30/30 Spring Brakes
- 16.5" x 7" Cam Operated "Q" Type Shoes
 - Automatic Slacks Outboard Drums
- 8.25 x 22.5 Steel Disc Wheels
- 255/70R22.5 R194 Bridgestone Radials

LANDING GEAR

- Holland — 50,000 Lbs.

Aztec Trailers Inc. reserves the right to make styling, equipment, design and/or construction changes without prior notice. Some equipment shown may be optional.

ELECTRICAL

- Truck Lite Sealed Light System
- 2 Tail Lights Each Side
- Mid-Turn Signal Both Sides
- Front and Rear Marker Lights
- 7-Way Socket
- Wabco Anti-Lock Brake System

FINISH

- All Metal Surfaces — Cleaned, Phosphatized and Painted with a 2-Part Urethane
- Standard Color — Black (Other Colors Upon Request)
- Mud Flaps
- DOT Standard Reflective Tape

FLOORING

- 1 1/8" "One Piece" Apitong Attached with 5/16" Floor Screws

BEAVERTAIL

- 18° Slope
- 5' with Spring Assist Fold-Up Ramps

OPTIONS

- Ask About Our Many "Non-Standard" Models As Well As Optional Equipment



Aztec Trailers Inc.

P.O. Box 677 — 2155 Hwy. 1187 — Mansfield, Texas 76063 — 817/477-3411 — Fax 817/473-3045

1-888/444-8066

www.aztectrailers.com